


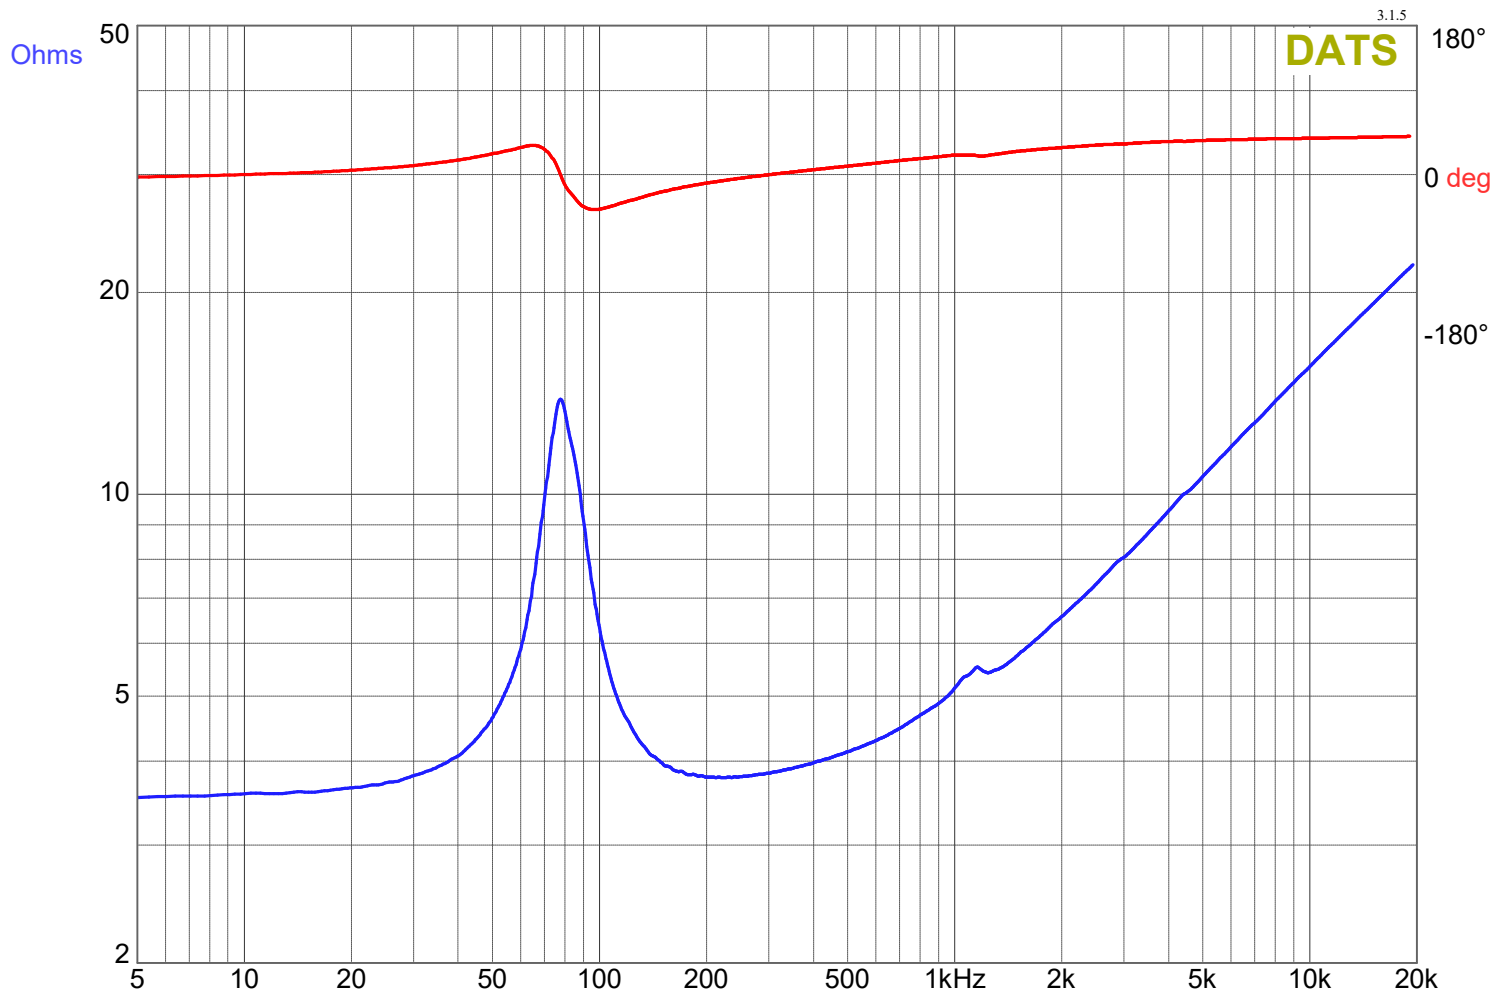

Workbench Notes:

Manufacturer: MDS

$f(s) = 77.75 \text{ Hz}$

$Q(ts) = 1.203$

$V(as) = 13.69 \text{ liters (0.4835 cubic feet)}$

$SPL = 87.9 \text{ dB SPL } 1W/1m$

Nominal Diam. = 140 mm (6 in.)

Model: FP6B

$R(e) = 3.524 \text{ Ohms}$

$Q(es) = 1.614$

Piston Diam. = 152.4 mm (6 in.)

$SPL = 91.46 \text{ dB SPL } 2.83 \text{ Vrms}$

$C(ms) = 0.293 \text{ mm/N}$

$Z(max) = 13.85 \text{ Ohms}$

$L(e) = 0.2433 \text{ mH at } 10\text{kHz}$

$Q(ms) = 4.728$

$BL = 3.906$

$\eta(0) = 0.3803 \%$

$M(ms) = 14.3 \text{ grams}$

Autoviihde Finland Oy

Pauketie 2

Oulu 90410

08 348300

Measurements by: Niko Luomajoki

Title: Audio engineer