


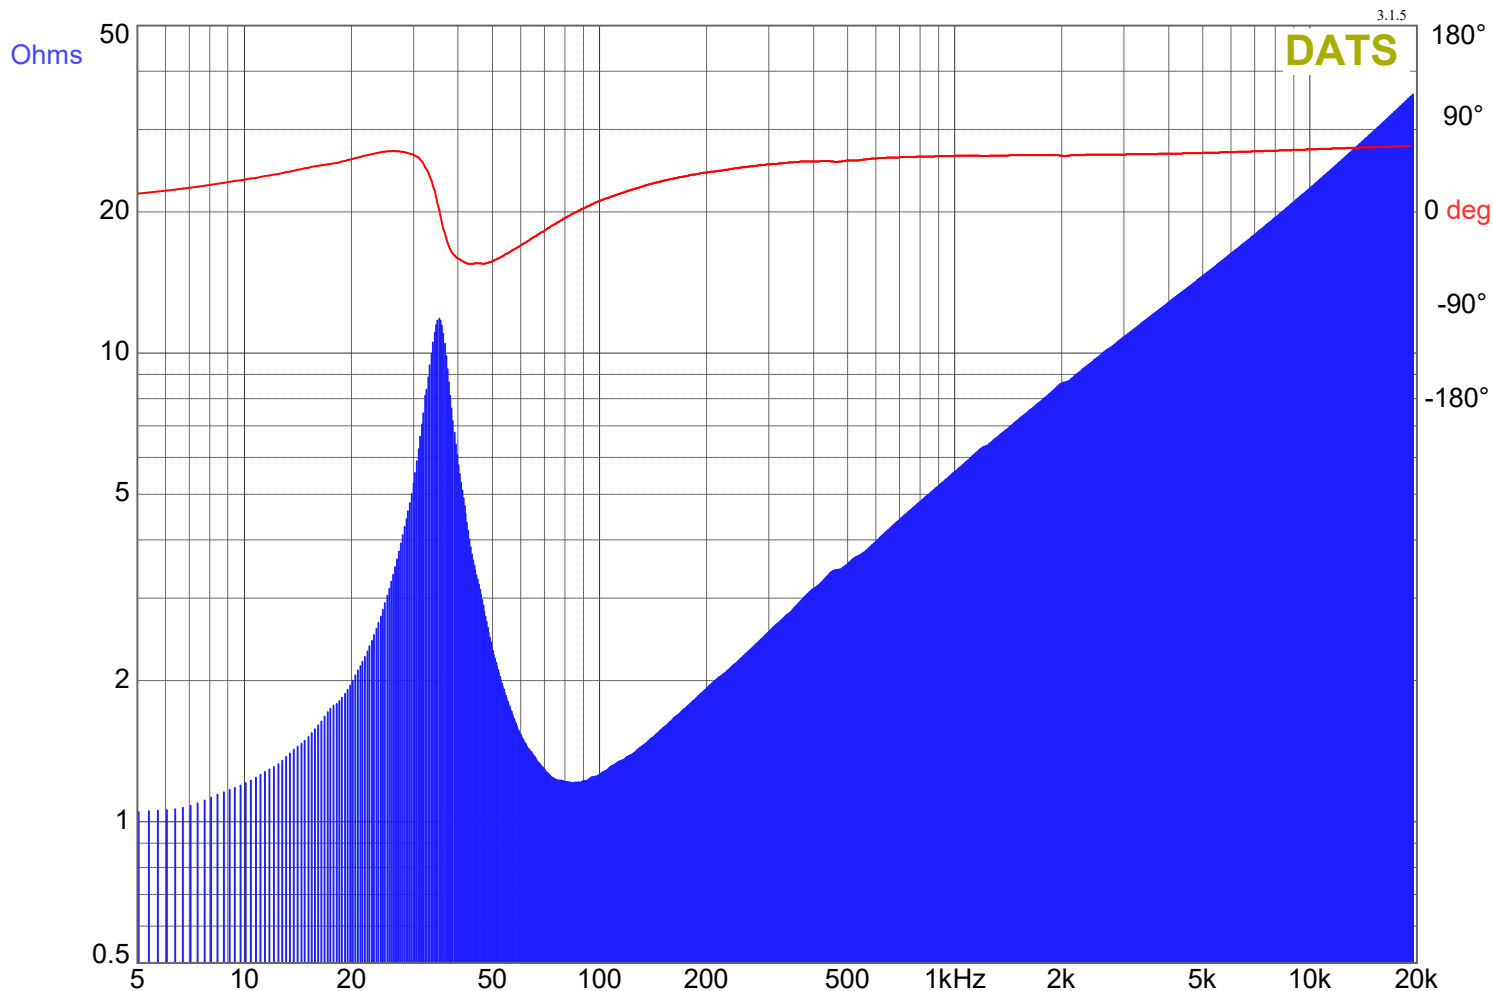

Workbench Notes:

Manufacturer: MDS

$f(s) = 35.33$ Hz

$Q(ts) = 0.5839$

$V(as) = 83.84$ liters (2.961 cubic feet)

SPL = 89.51 dB SPL 1W/1m

Nominal Diam. = 0 mm (0 in.)

Model: PS12500D2

$R(e) = 1.035$ Ohms

$Q(es) = 0.6399$

Piston Diam. = 284 mm (11.18 in.)

SPL = 98.39 dB SPL 2.83 Vrms

$C(ms) = 0.149$ mm/N

$Z(max) = 11.83$ Ohms

$L(e) = 0.3607$ mH at 10kHz

$Q(ms) = 6.671$

BL = 7

$n(0) = 0.5509$ %

$M(ms) = 136.4$ grams

Mittaus suoritettu 4h subwooferin sisäänajon jälkeen.

Autoviihde Finland Oy

Pauketie 2

Oulu 90410

08 348300

Measurements by: Hannu Markuksela

Title: Audio engineer