


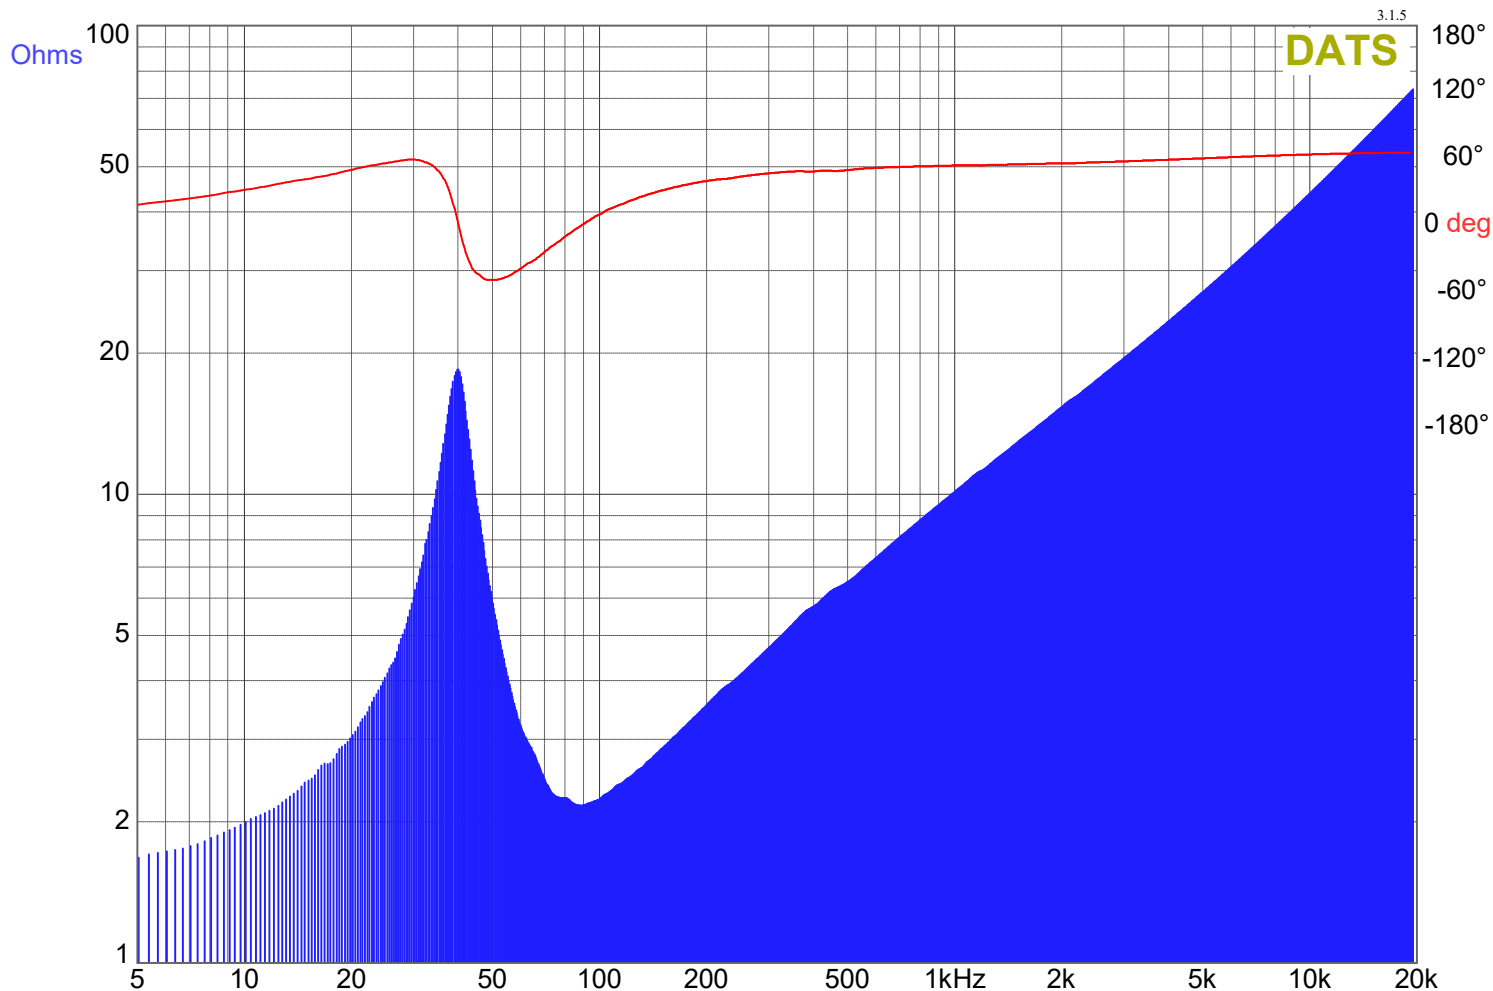

Workbench Notes:

Manufacturer: MDS

$f(s) = 39.87 \text{ Hz}$

$Q(ts) = 0.5215$

$V(as) = 47.51 \text{ liters (1.678 cubic feet)}$

$SPL = 89.12 \text{ dB SPL } 1W/1m$

Nominal Diam. = 300 mm (12 in.)

Model: PS121000D4

$R(e) = 1.575 \text{ Ohms}$

$Q(es) = 0.5701$

Piston Diam. = 300 mm (11.81 in.)

$SPL = 96.18 \text{ dB SPL } 2.83 \text{ Vrms}$

$C(ms) = 0.068 \text{ mm/N}$

$Z(max) = 18.45 \text{ Ohms}$

$L(e) = 0.7009 \text{ mH at } 10\text{kHz}$

$Q(ms) = 6.109$

$BL = 12.76$

$n(0) = 0.5036 \%$

$M(ms) = 235.4 \text{ grams}$

Mittaus suoritettu 4h subwooferin sisäänaajon jälkeen.

Autoviihde Finland Oy

Pauketie 2

Oulu 90410

08 348300

Measurements by: Hannu Markuksela

Title: Audio engineer