


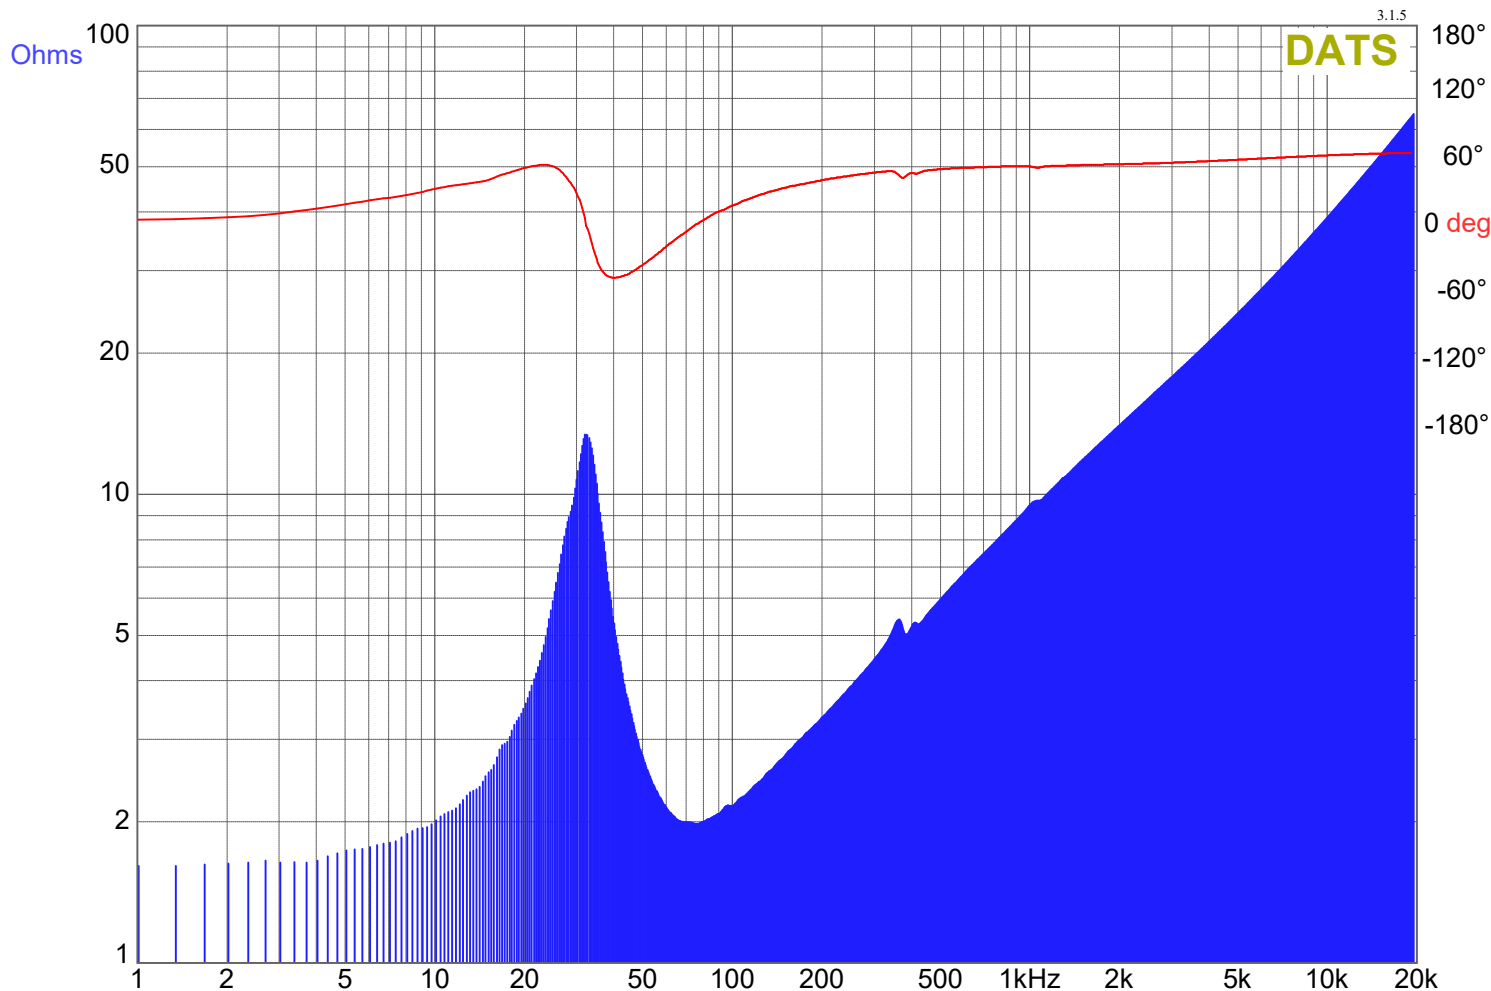

Workbench Notes:

Manufacturer: DLE

$f(s) = 32.13 \text{ Hz}$

$Q(ts) = 0.6053$

$V(as) = 131.3 \text{ liters (4.637 cubic feet)}$

$SPL = 89.91 \text{ dB SPL } 1W/1m$

Nominal Diam. = 0 mm (0 in.)

Model: FF15D4

$R(e) = 1.612 \text{ Ohms}$

$Q(es) = 0.688$

Piston Diam. = 381 mm (15 in.)

$SPL = 96.87 \text{ dB SPL } 2.83 \text{ Vrms}$

$C(ms) = 0.072 \text{ mm/N}$

$Z(max) = 13.41 \text{ Ohms}$

$L(e) = 0.6231 \text{ mH at } 10\text{kHz}$

$Q(ms) = 5.036$

$BL = 12.7$

$n(0) = 0.6037 \%$

$M(ms) = 341.1 \text{ grams}$

Mittaus suoritettu 4h subwooferin sisäänajon jälkeen.

Autoviihde Finland Oy

Paukatie 2

Oulu 90410

08 348300

Measurements by: Niko Luomajoki

Title: Audio engineer