


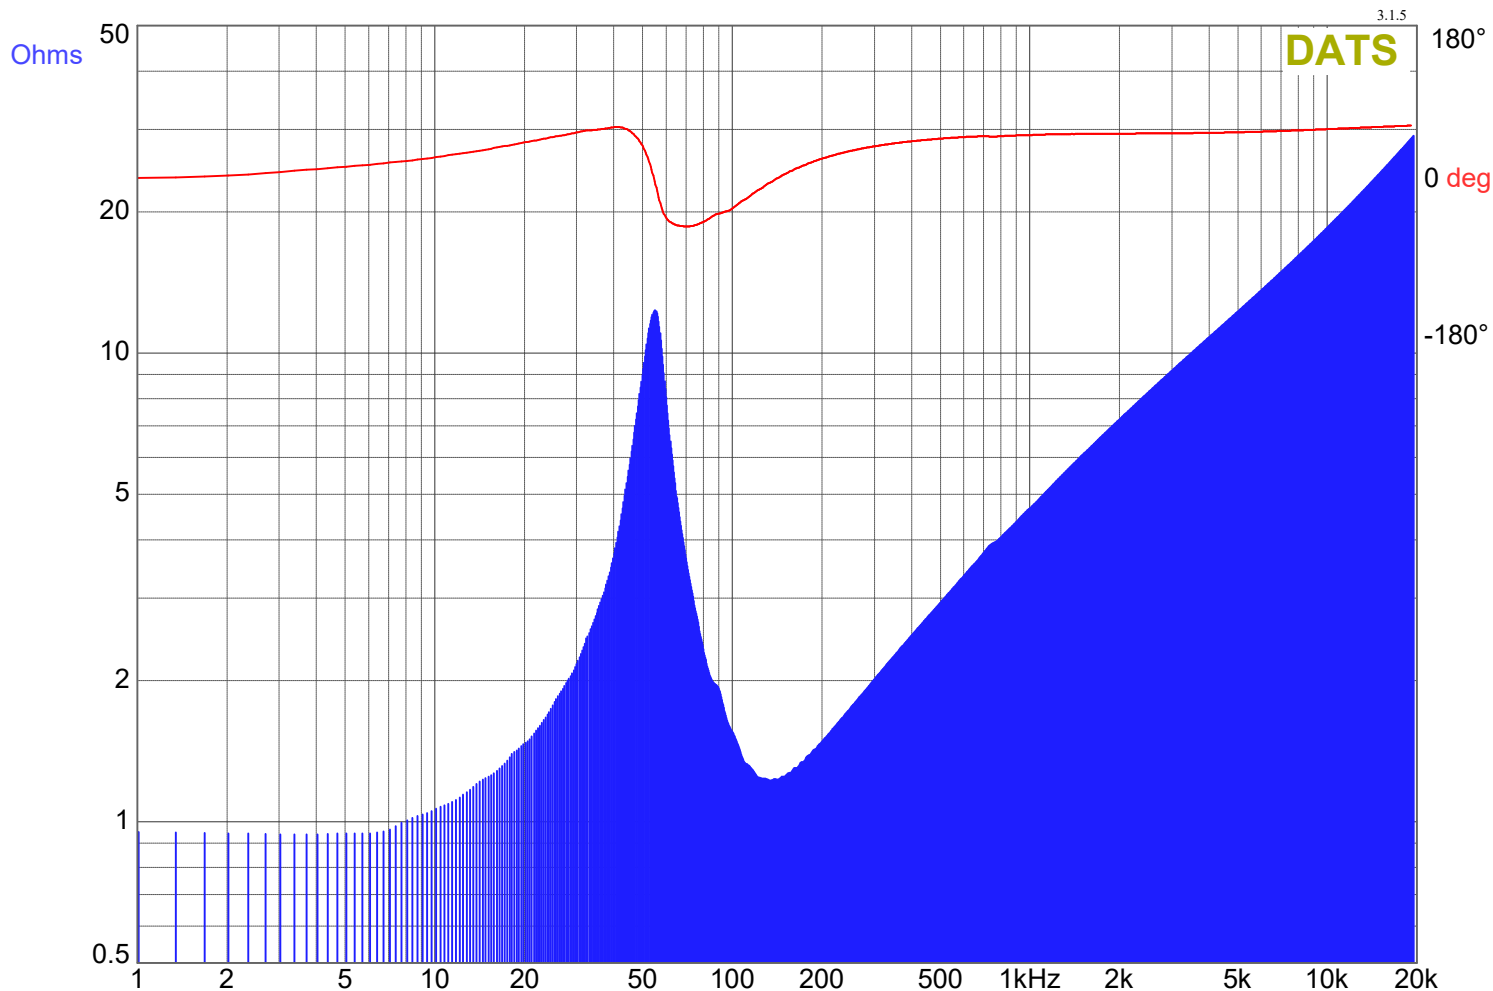

Workbench Notes:

Manufacturer: MDS

$f(s) = 54.98 \text{ Hz}$

$Q(ts) = 0.4633$

$V(as) = 6.812 \text{ liters (0.2406 cubic feet)}$

$SPL = 85.43 \text{ dB SPL 1W/1m}$

Nominal Diam. = 150 mm (6.5 in.)

Model: PS06500D2

$R(e) = 0.9337 \text{ Ohms}$

$Q(es) = 0.5012$

Piston Diam. = 165.1 mm (6.5 in.)

$SPL = 94.76 \text{ dB SPL 2.83 Vrms}$

$C(ms) = 0.106 \text{ mm/N}$

$Z(max) = 12.34 \text{ Ohms}$

$L(e) = 0.2983 \text{ mH at 10kHz}$

$Q(ms) = 6.122$

$BL = 7.138$

$\eta(0) = 0.2153 \%$

$M(ms) = 79.19 \text{ grams}$

Mittaus suoritettu 4h subwooferin sisäänajon jälkeen.

Autoviihde Finland Oy

Pauketie 2

Oulu 90410

08 348300

Measurements by: Niko Luomajoki

Title: Audio engineer