


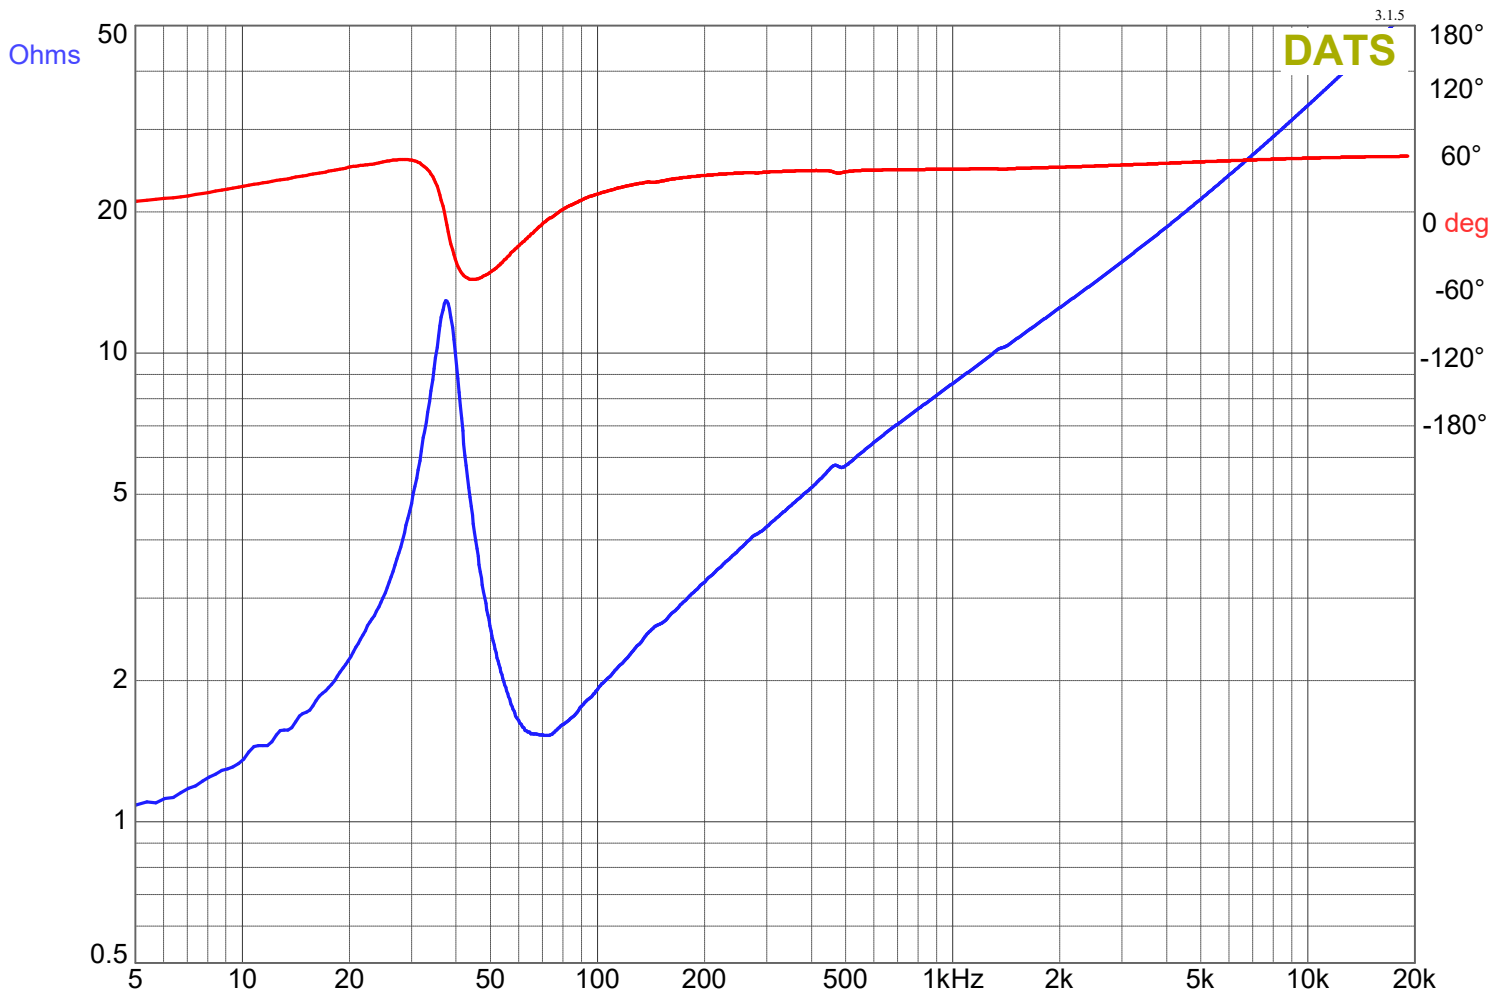

Workbench Notes:

Manufacturer: MDS

$f(s) = 37.48$ Hz

$Q(ts) = 0.5922$

$V(as) = 61.37$ liters (2.167 cubic feet)

SPL = 88.88 dB SPL 1W/1m

Nominal Diam. = 350 mm (15 in.)

Model: PS152000D2

$R(e) = 1.085$ Ohms

$Q(es) = 0.6464$

Piston Diam. = 381 mm (15 in.)

SPL = 97.56 dB SPL 2.83 Vrms

$C(ms) = 0.034$ mm/N

$Z(max) = 12.95$ Ohms

$L(e) = 0.5409$ mH at 10kHz

$Q(ms) = 7.067$

BL = 14.56

$\eta(0) = 0.4766$ %

$M(ms) = 536.4$ grams

Mittaus suoritettu 5h subwooferin sisäänajon jälkeen

Autoviihde Finland Oy

Pauketie 2

Oulu 90410

08 348300

Measurements by: Niko Luomajoki

Title: Audio engineer