


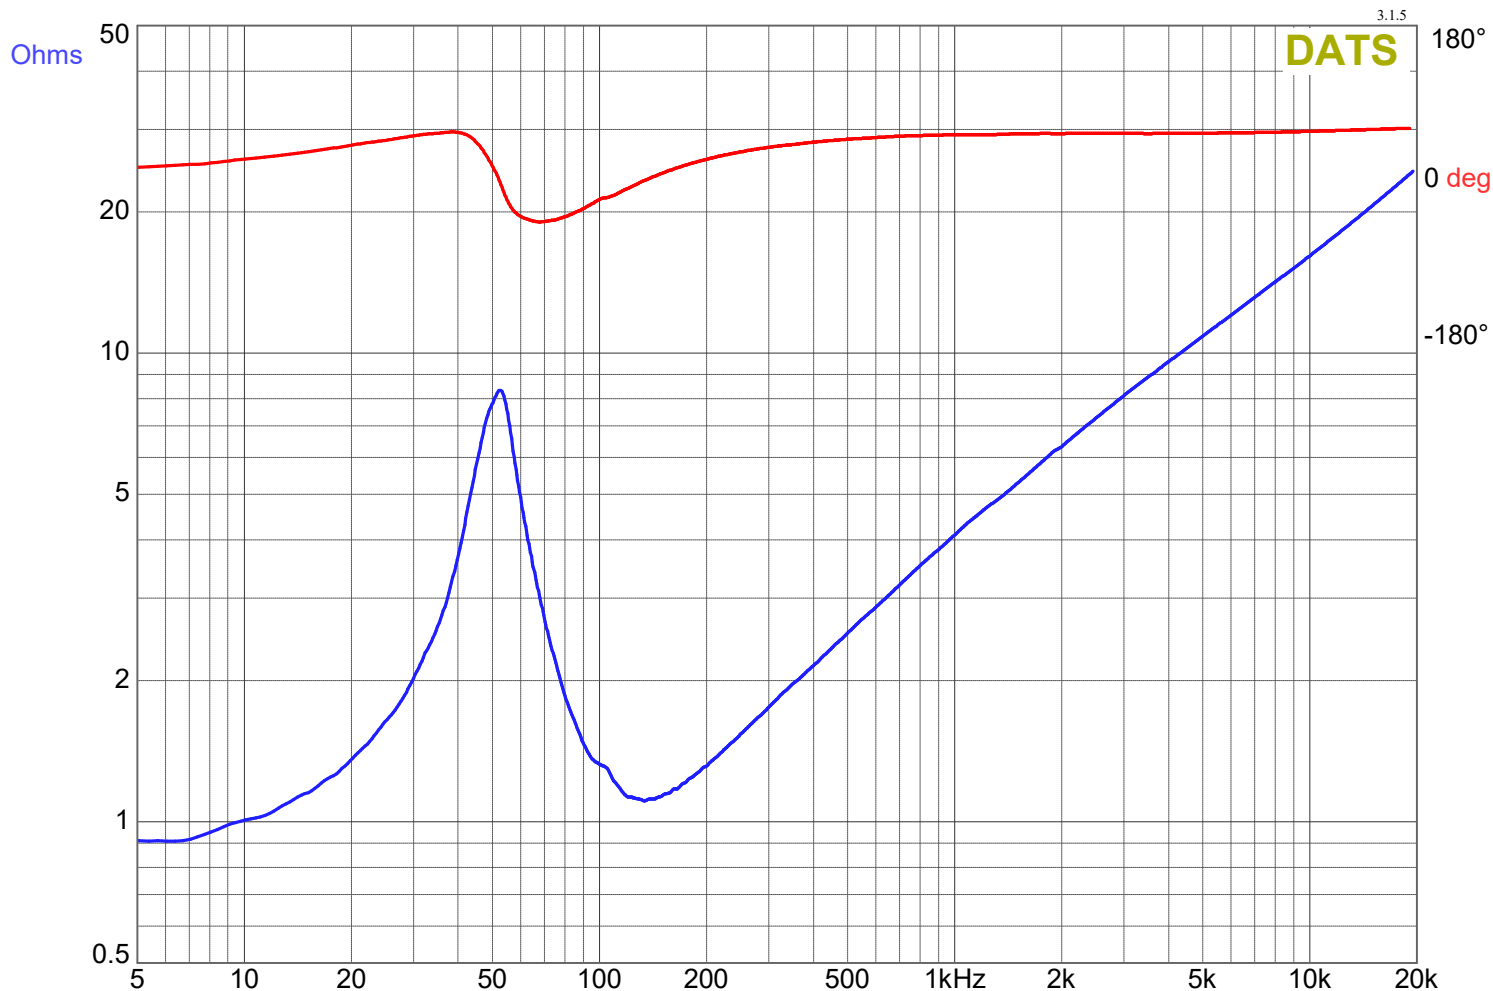

Workbench Notes:

Manufacturer: MDS

$f(s) = 52.62$ Hz

$Q(ts) = 0.5118$

$V(as) = 19.55$ liters (0.6902 cubic feet)

SPL = 88.85 dB SPL 1W/1m

Nominal Diam. = 200 mm (8 in.)

Model: PS08500D2

$R(e) = 0.9035$ Ohms

$Q(es) = 0.5742$

Piston Diam. = 203.2 mm (8 in.)

SPL = 98.32 dB SPL 2.83 Vrms

$C(ms) = 0.132$ mm/N

$Z(max) = 8.323$ Ohms

$L(e) = 0.2604$ mH at 10kHz

$Q(ms) = 4.715$

BL = 5.997

$\eta(0) = 0.4729$ %

$M(ms) = 69.13$ grams

Mittaus suoritettu 5h subwooferin sisäänajon jälkeen

Autoviihde Finland Oy

Pauketie 2

Oulu 90410

08 348300

Measurements by: Niko Luomajoki

Title: Audio engineer