


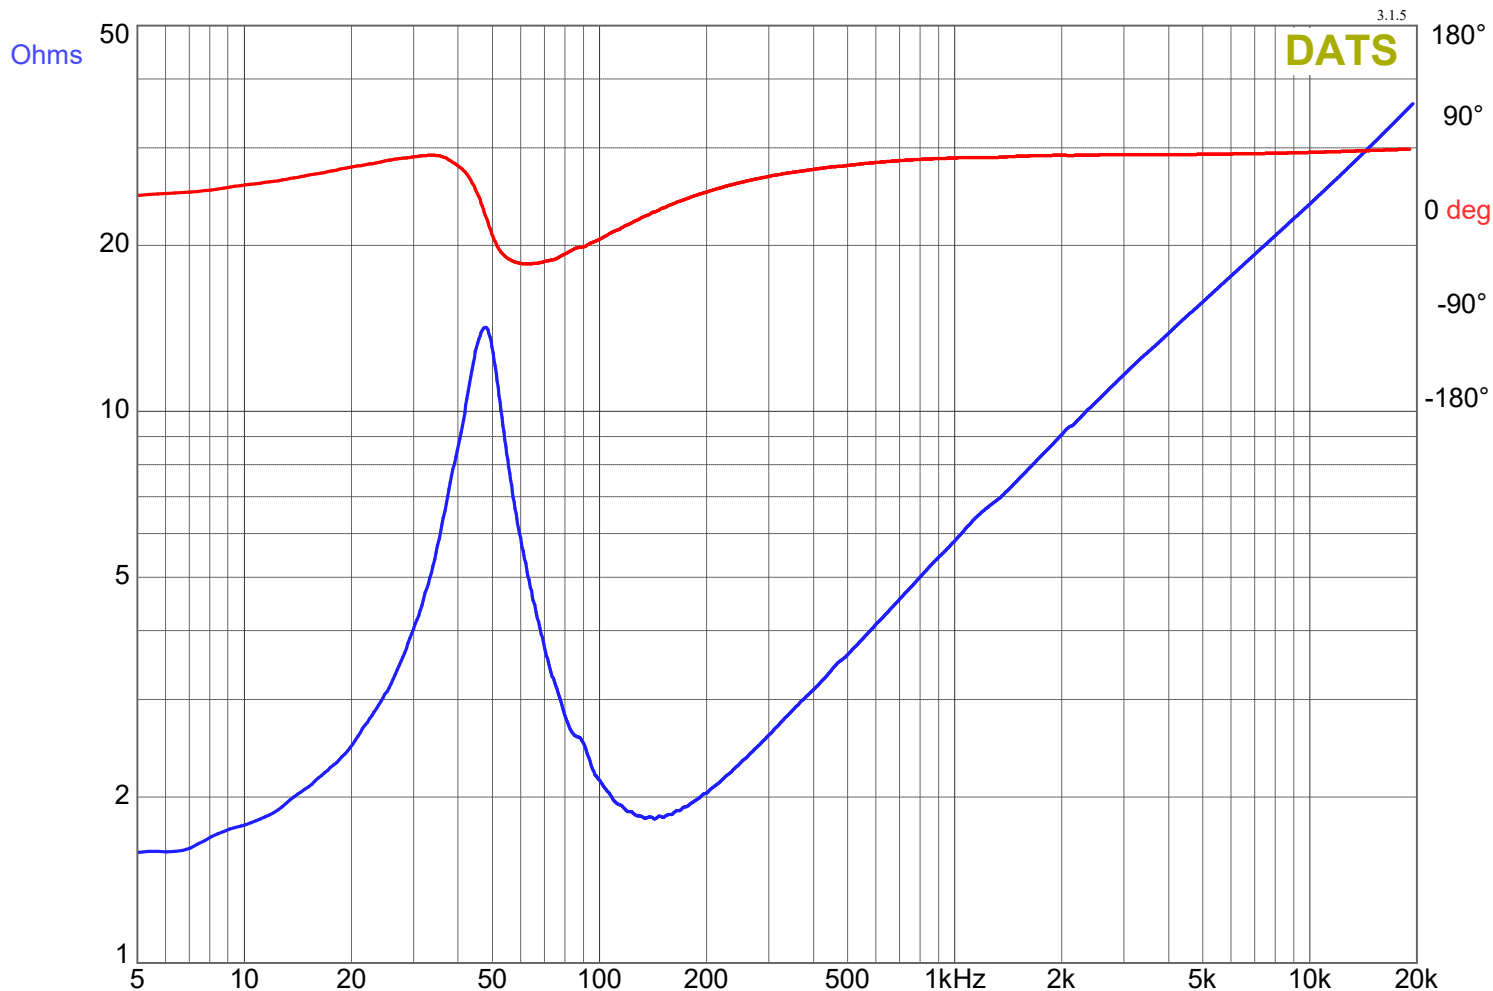

Workbench Notes:

Manufacturer: MDS

$f(s) = 47.84 \text{ Hz}$

$Q(ts) = 0.5003$

$V(as) = 23.06 \text{ liters (0.8145 cubic feet)}$

$SPL = 88.42 \text{ dB SPL } 1W/1m$

Nominal Diam. = 200 mm (8 in.)

Model: PS08500D4

$R(e) = 1.57 \text{ Ohms}$

$Q(es) = 0.5627$

Piston Diam. = 203.2 mm (8 in.)

$SPL = 95.49 \text{ dB SPL } 2.83 \text{ Vrms}$

$C(ms) = 0.156 \text{ mm/N}$

$Z(max) = 14.16 \text{ Ohms}$

$L(e) = 0.3811 \text{ mH at } 10\text{kHz}$

$Q(ms) = 4.514$

$BL = 7.71$

$n(0) = 0.428 \%$

$M(ms) = 70.87 \text{ grams}$

Mittaus suoritettu 5h subwooferin sisäänajon jälkeen

Autoviihde Finland Oy

Pauketie 2

Oulu 90410

08 348300

Measurements by: Niko Luomajoki

Title: Audio engineer