


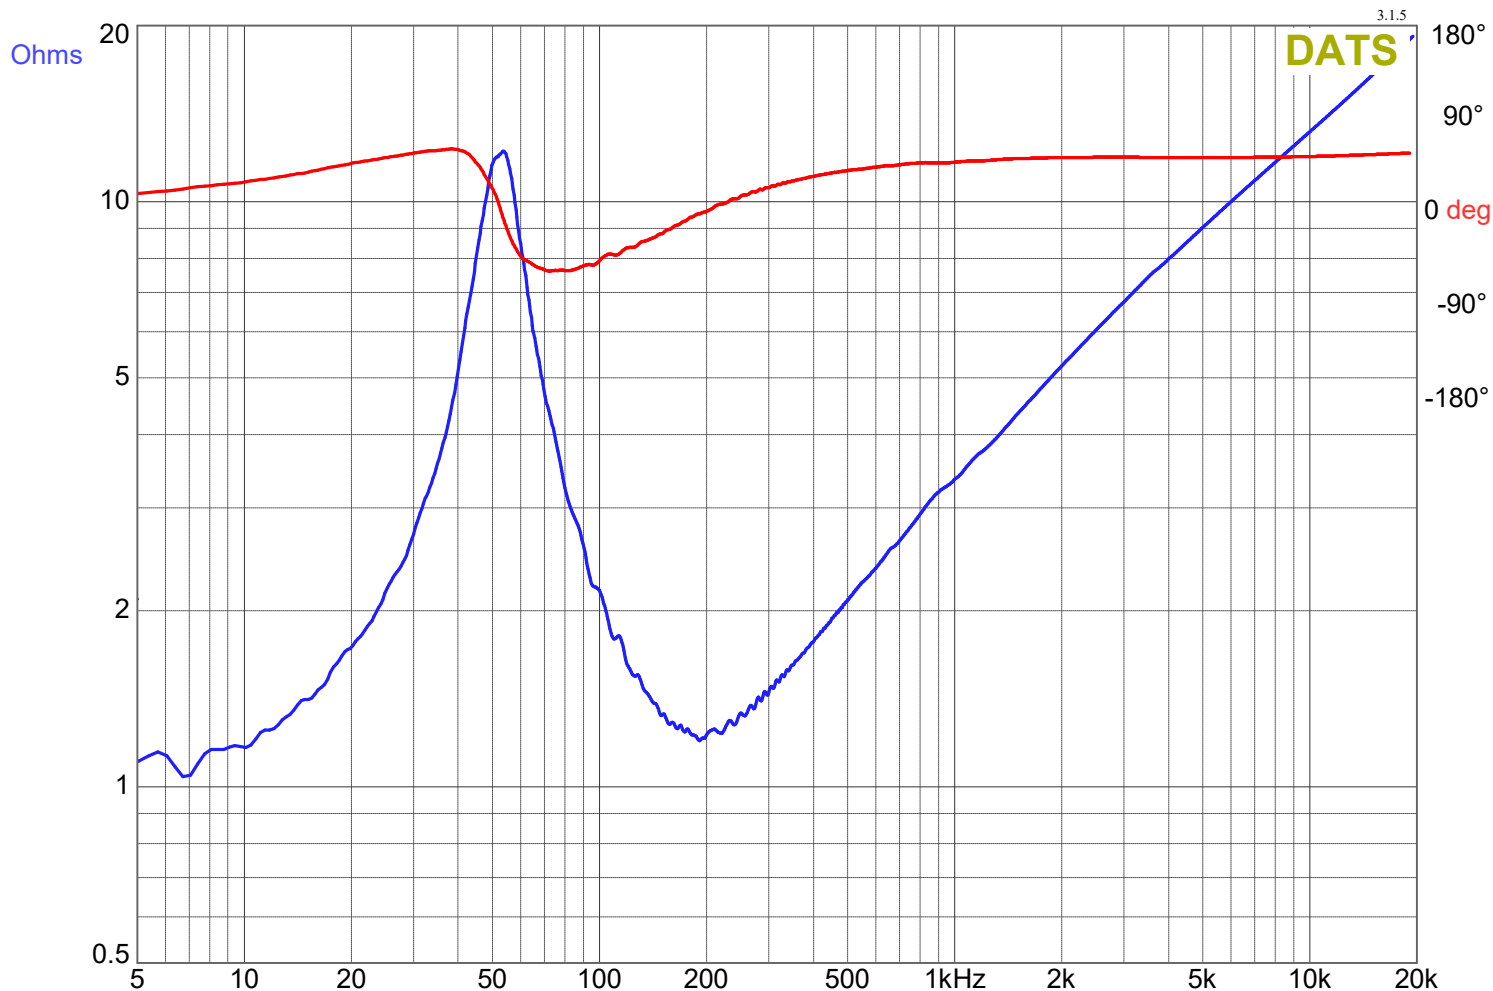

Workbench Notes:

Manufacturer: MDS

$f(s) = 53.6$ Hz

$Q(ts) = 0.3904$

$V(as) = 7.47$ liters (0.2638 cubic feet)

SPL = 86.17 dB SPL 1W/1m

Nominal Diam. = 160 mm (6 in.)

Model: W170

$R(e) = 1.108$ Ohms

$Q(es) = 0.4294$

Piston Diam. = 152.4 mm (6 in.)

SPL = 94.76 dB SPL 2.83 Vrms

$C(ms) = 0.16$ mm/N

$Z(max) = 12.19$ Ohms

$L(e) = 0.2124$ mH at 10kHz

$Q(ms) = 4.294$

BL = 6.925

$\eta(0) = 0.2554$ %

$M(ms) = 55.16$ grams

Mittaus suoritettu 5h subwooferin sisäänajon jälkeen

Autoviihde Finland Oy

Pauketie 2

Oulu 90410

08 348300

Measurements by: Niko Luomajoki

Title: Audio engineer